

High Voltage Hall Effect Switch Sensor

1. Introduction

HK402H Hall-Effect bipolar sensor, employed with high voltage bipolar technology, has been designed purposely for automotive and industrial applications, and operates with supply voltages from 3.8 V to 60 V in temperature range from -40 °C up to 150 °C. AH402H is available in SMD-package SOT23 and in the leaded version TO92UA.

2. Features

- Operates from 3.8 V to 60 V supply voltage
- Overvoltage protection capability up to 80 V
- Highest ESD performance up to ±4 kV
- Short-circuit protected open-drain output
- Wide temperature range from -40 °C to 150 °C
- Reverse-voltage protection at VSUP pin
- Ideal sensor for applications in extreme automotive and industrial environments
- Tiny SOT23 (-SU) package and TO92 (-UA)package

3. Potential Applications


- Brushless DC motor commutation
- Speed measurement
- Revolution counting
- Angular position detection
- Proximity detection

4. Block Diagram


The circuit includes temperature compensated voltage regular, Hall plate, signal amplifier and Schmitt-Trigger in single silicon chip. The regulated voltage provides the reference voltage for the hall plate. A magnetic field perpendicular to the sensor surface generates a hall voltage, which is amplified and then sent to a Schmitt trigger. A protection diode against reverse power supply is integrated.

HK402H

High Voltage Hall Effect Switch Sensor

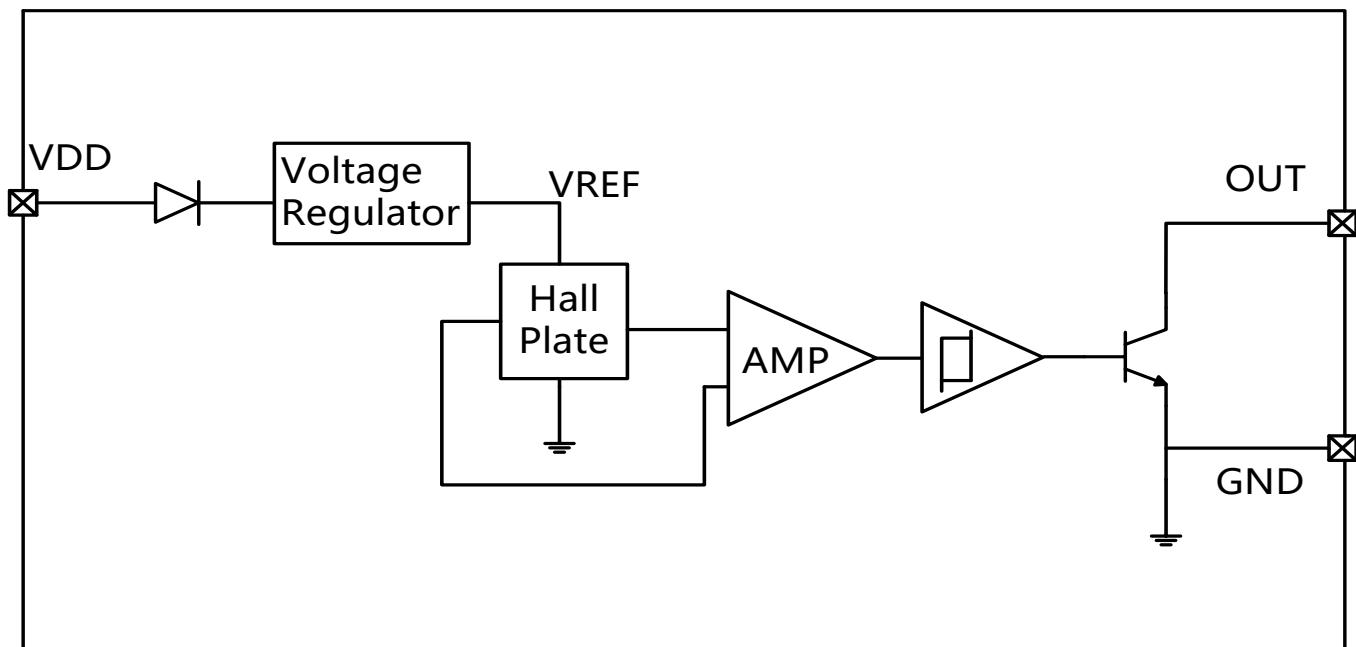


5. Pin Description

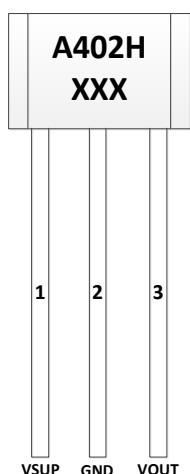

TO92S

XXX
 ↓ ↓
 year(0-9) week(01-52)

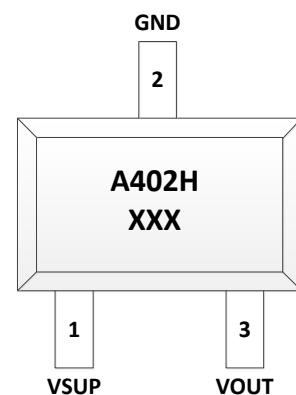

SOT23

6. Ordering information

Partnumber	package	Packing	Ambient, TA
HK402HUA	TO92S	Bulk, 1000 pieces/bag	-40°C to 150°C
HK402HSU	SOT23	Reel, 3000pieces/reel	-40°C to 150°C

HK402H

High Voltage Hall Effect Switch Sensor

7. Pin assignment

SOT23-3LPin number	TO92SPin number	Name	Function
1	1	VSUP	Power supply
2	2	GND	Ground
3	3	VOUT	Open collector output with a pull-up resistor

8. Absolute Maximum Ratings

Parameters	Symbol	Min	Max	Units
Power supply Voltage	VSUP	-60	80	V
Output voltage	VOUT	-0.5	80	V
Output current sink	Isink	0	40	mA
Operating ambient temperature	Ta	-40	150	°C
Storage temperature	Tstg	-50	165	°C

9. Electrical and magnetic characteristics(Ta=25°C)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Units
Electrical characteristics						
VSUP	Supply voltage		3.8		60	V
ISUP	Supply current			4.8	8	mA
Ile	Leakage current	Off state			10	uA
Vsat	Output saturation voltage	On state			0.4	V
Tr	Output rise time	Rload=1kohms Cload=20pF			1	uS
Tf	Output fall time	Rload=1kohms Cload=20pF			1.5	uS
Magnetic characteristics						
Bop	Operate point	Rload=1kohms Cload=20pF	10	25	40	Gauss
Brp	Release point		-40	-25	-10	Gauss
Bphys	Hysteresis			50		Gauss


10. Magnetoelectric conversion characteristics

Apply a magnetic field greater than Bop on the seal side of TO92S package (near the South Pole), and the output becomes low; Apply a magnetic field less than Brp (near the North Pole) and the output becomes


HK402H

High Voltage Hall Effect Switch Sensor


high. When the chip is first powered on, if the magnetic field is between the B_{op} and the B_{rp} , the output state is in an undefined state (high or low). The magnetic field polarity of the operating and releasing points of SOT23-3L package is opposite to that of TO92S. See below.

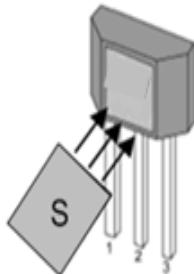


$V_{OUT} = \text{low}$

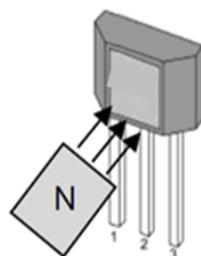


$V_{OUT} = \text{high}$

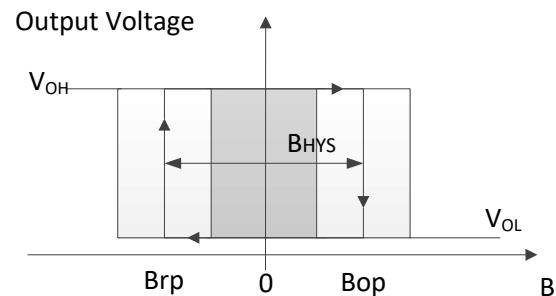


TO92S output state



$V_{OUT} = \text{low}$




$V_{OUT} = \text{high}$

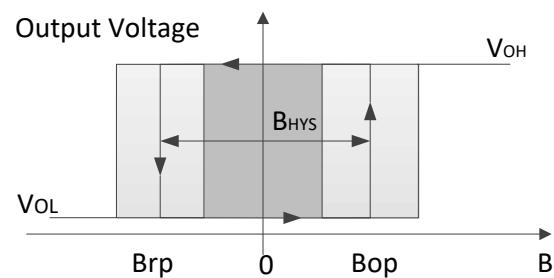

SOT23-3L output state

11. Application Circuit


Typical application circuit (see Fig. below)

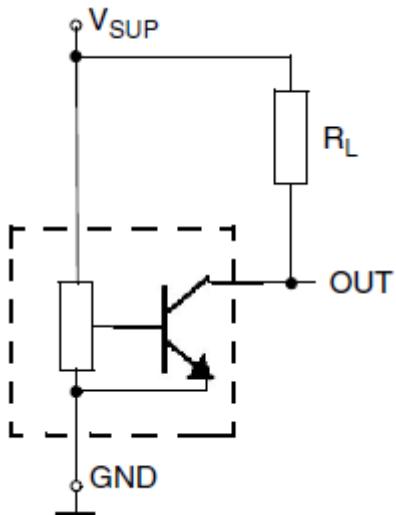HK402H***High Voltage Hall Effect Switch Sensor***


An example of typical application circuit

For applications with disturbances on the supply line or radiated disturbances, a series resistor R_V and two capacitors C_P and C_L all placed close to the sensor are recommended (see Fig. below).


For example: $R_V = 100$ ohms, $C_P = 4.7$ nF, and $C_L = 1$ nF.

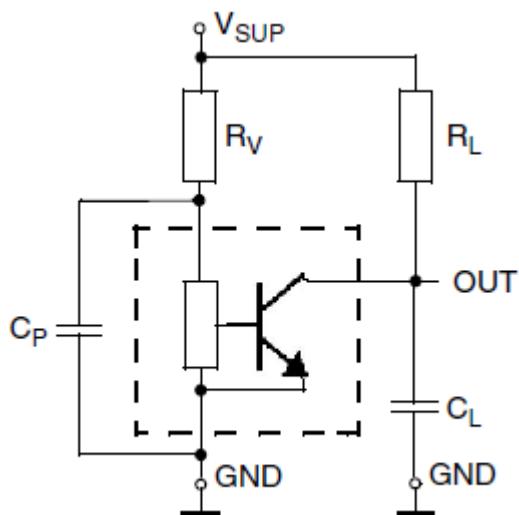

Example of application circuit 2

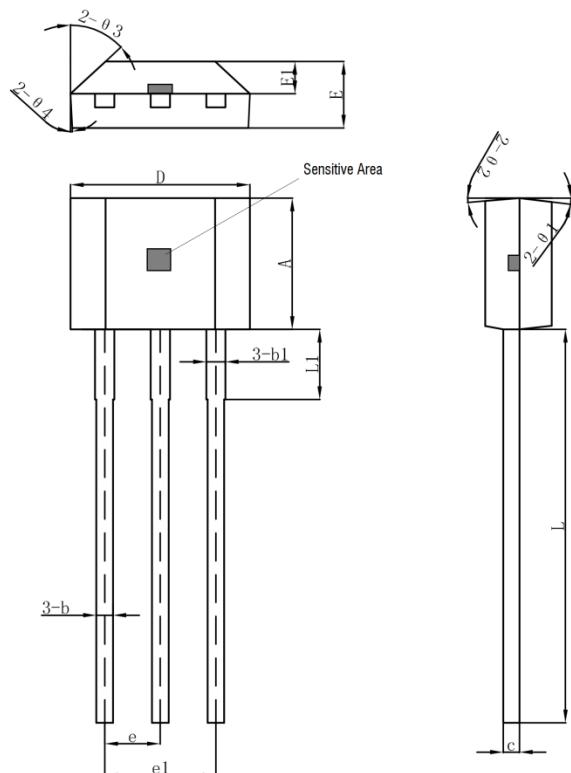HK402H**High Voltage Hall Effect Switch Sensor****12. Outline dimensions****package outline****TO92S**

	Mechanical Dimension /mm		
symbol	Min.	TYP.	Max.
A	2.90	3.00	3.10
b	0.35	0.39	0.40
b1		0.44	
c	0.36	0.38	0.40
D	4.00	4.10	4.20
E	1.42	1.52	1.62
E1		0.75	
e		1.27	
e1		2.54	
L1		2.54	
L	13.50	14.50	15.50
θ1		6°	
θ2		3°	
θ3		45°	
θ4		3°	
h		3.6	

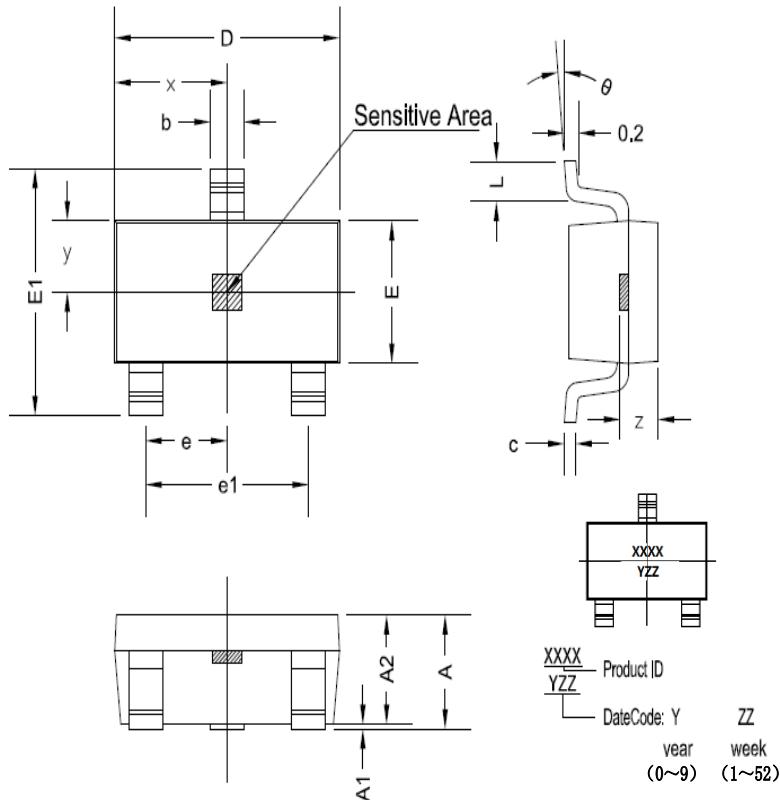HK402H**High Voltage Hall Effect Switch Sensor****HK402HSU package outline**

symbol	Size (mm)		Size (in inches)	
	minimum	maximum	minimum	maximum
A	1.05	1.25	0.041	0.049
A1	0	0.1	0	0.004
A2	1.05	1.15	0.041	0.045
b	0.3	0.5	0.012	0.02
c	0.100	0.2	0.004	0.008
D	2.82	3.02	0.111	0.119
E	1.5	1.7	0.059	0.067
E1	2.65	2.95	0.104	0.116
e	0.950 TYP		0.037 TYP	
e1	1.8	2	0.071	0.079
L	0.3	0.6	0.012	0.024
x	1.460TYP		0.057TYP	
y	0.800TYP		0.032TYP	
z	0.600TYP		0.024TYP	
θ	0°	8°	0°	8°